
(Dis)assembly instruction for the GANNET Positioning Device

REF 10112.07.001

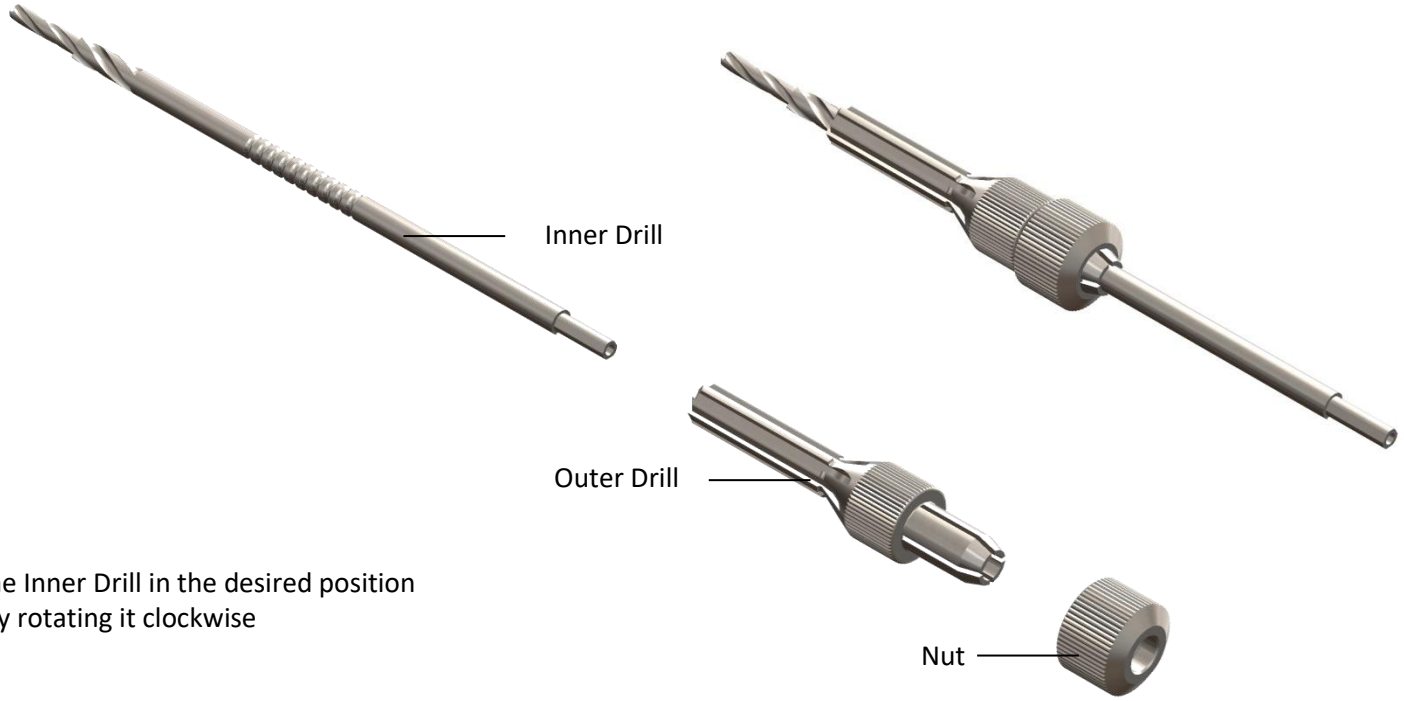

Assembly:

1. Place the outer Drill onto the Inner Drill in the desired position
2. Place and tighten the Nut by rotating it clockwise

Disassembly:

1. Untighten the Nut by rotating it counterclockwise and remove
2. Remove the outer drill from the inner drill